




## Dismantling joints with 3 flanges, PN 25

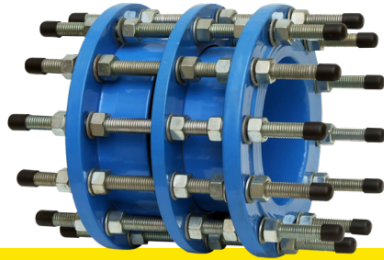

Art. 20042

Flanges: UNI EN 1092-2 PN 25

Installation: horizontal / vertical

APPLICATIONS • Water supply • Industry • Irrigation •

Pumping stations • Water treatment plants •

Hydropower plants • Reservoirs • Sewage


Epoxy painting suitable for drinking water applications.

The dismantling joints with 3 flanges are used in order to mount and dismantle valves from the pipeline. The extensible construction of dismantling joints allows to change the length of the joint itself, for easier installation or dismantling procedures. The body of the joint is made in ductile iron or cast steel with epoxy resin coating, with rubber gasket NBR and galvanized steel studs and bolts.

### Materials

body	ductile iron GGG40, EN-GJS-400 (or cast steel)
gasket	rubber
stud	electro galvanized steel
painting	epoxy

## Dimensions

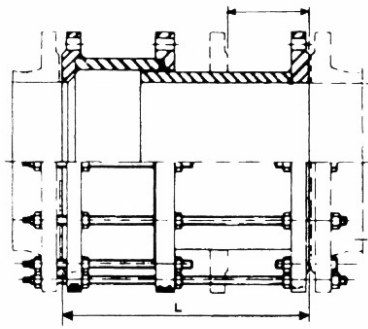

DN	L MAX mm.	L MIN mm.	C mm.	Weight kg.
80	210	180	30	25
100	220	190	30	26
125	220	190	30	41
150	230	200	30	58
200	230	200	30	100
250	250	220	30	110
300	250	220	30	142
350	270	240	30	207
400	280	250	30	265
450	280	250	30	241
500	300	270	30	373
600	320	290	30	527
700	340	310	30	662
800	360	330	30	873
900	380	350	30	950
1000	400	370	30	1338
1200	450	420	30	1670
1400	480	430	50	1968
1600	510	460	50	2500
1800	540	490	50	3500
2000	580	530	50	4150

